

Snubber

Model : A050

Spec. sheet no. AD00-05

Service intended

It is used for suppressing the effect of pressure pulse and pressure spike. It features the adjustable needle valve to restrict the flow as operating conditions may demand.




Ordering information

Base model : 1th thru 4th characters

A050 : Snubber

Max. static pressure up to 35 MPa

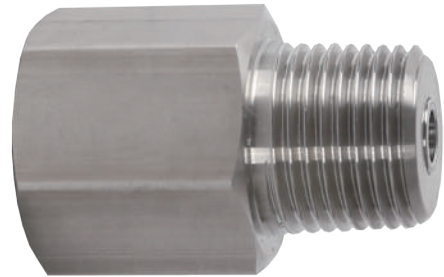


5 th character		6 th character		7 th character		8 th character	
Code	Unused type	Code	Material	Code	Gauge connection size	Code	Gauge connection type
A		D	316SS	0	1/4"	A	PF (F)
		F	316L SS	1	3/8"	B	PT (F)
		Z	Other	2	1/2"	C	NPT (F)
				9	Other	Z	Other

9 th character		10 th character		11 th thru 15 th character	
Code	Process connection size	Code	Process connection type	Code	Unused character
C	3/8"	G	PF (M)	A0000	
D	1/2"	H	PT (M)		
Z	Other	J	NPT (M)		
		Z	Other		

A050AD2BDJA0000 sample ordering number

A050 : Type of mounting

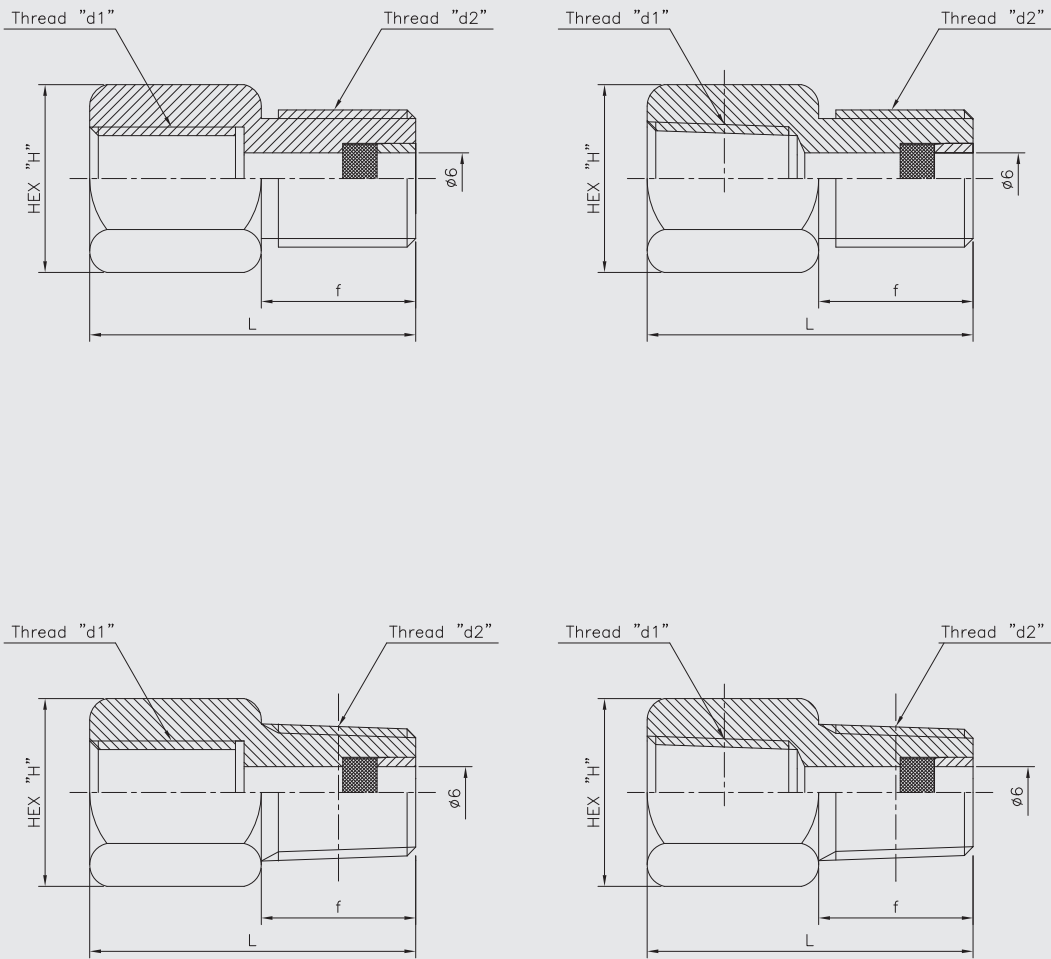

* L : Maker standard

d1			d2			
	PF	1/2		PF		3/8
	PT			PT		1/2
	NPT			NPT		
Selection :						