

Euro gauge

Inductive contact type temperature gauge (Modular system)

Model : T501(H), T502(H/L), T503(L), T504(H/HH), T505(L/LL)

Spec. sheet no. TD05-01

Service intended

Contact type temperature gauge is installed with electric contact actuated by pointer. It provides the function which electrical circuit can be opened or closed by manual set point. It is applicable where signal is required (Audible or visual alarm) for control of resistance or any other application with auxiliary relay and contact.



Nominal diameter

100 mm

Accuracy

±2.0% of full scale

Measuring system (SAMA class IIIB)

Organic gas : 0 ~ 200°C

Inert gas : -200 ~ 700°C

Working range

Maximum scale value



Standard features

Location of stem and mounting

Bottom connection, surface, case mounting

Case

304SS

Cover

304SS

Bayonet type

Capillary

Capillary : 1.6/0.2 mm, 316SS

Armored tube : 7.5/5.5 mm, 304SS

Window

Polycarbonate

Dial

White aluminium with black graduation

Contacts

Maximum voltage : 250 V AC

Contact rating : AC 220 V, 0.25 A

DC 100 V, 0.5 A

With max. no of contact : 2 sets per gauge

Pointer

Black painted aluminium alloy

Stem

8.0, 10.0 and 12.0 mm

316SS and 316L SS

Stem, process connection

3/8", 1/2", 3/4" PT, NPT and PF

Optional

Special accuracy, ±1.0% of full scale

Main order

Ordering information

1. Base model

- T501** Inductive contact type temperature gauge (High alarm)
T502 Inductive contact type temperature gauge (High and low alarm)
T503 Inductive contact type temperature gauge (Low alarm)
T504 Inductive contact type temperature gauge (High and hihigh alarm)
T505 Inductive contact type temperature gauge (Low and lolow alarm)

2. Nominal diameter (mm)

- 4** 100

3. Type of mounting

- A** Bottom connection (Only direct mounting)
B Bottom connection, surface, case mounting plate
N Lower back entry and panel mounting

4. Stem material

- 1** 316SS
2 316L SS

5. Stem, process connection

- A** None
D $\frac{3}{8}$ "
E $\frac{1}{2}$ "
F $\frac{3}{4}$ "

6. Stem connection type (CF: Compression fitting)

- A** None
B PF
C PT
D NPT
E CF + PT
F CF + NPT
G CF + PF
H MT + PT (Movable thread)
I MT + NPT (Movable thread)
J MT + PF (Movable thread)

7. Stem outer diameter (mm)

- 2** 8.0
3 10.0
4 12.0

8. Range

XXX Refer to scale range table

9. Capillary length

- A** Direct mounting type
P 2 metre
Q 3 metre
S 5 metre
V 8 metre
X 10 metre
Z Other


10. Accessories

- 0** None
1 Thermowell
2 Special accuracy ($\pm 1.0\%$ of full scale)
3 Thermowell and special accuracy

1	2	3	4	5	6	7	8	9	10
T501	4	B	1	E	C	3	XXX	P	1

Sample
ordering code

T50X : Type of mounting

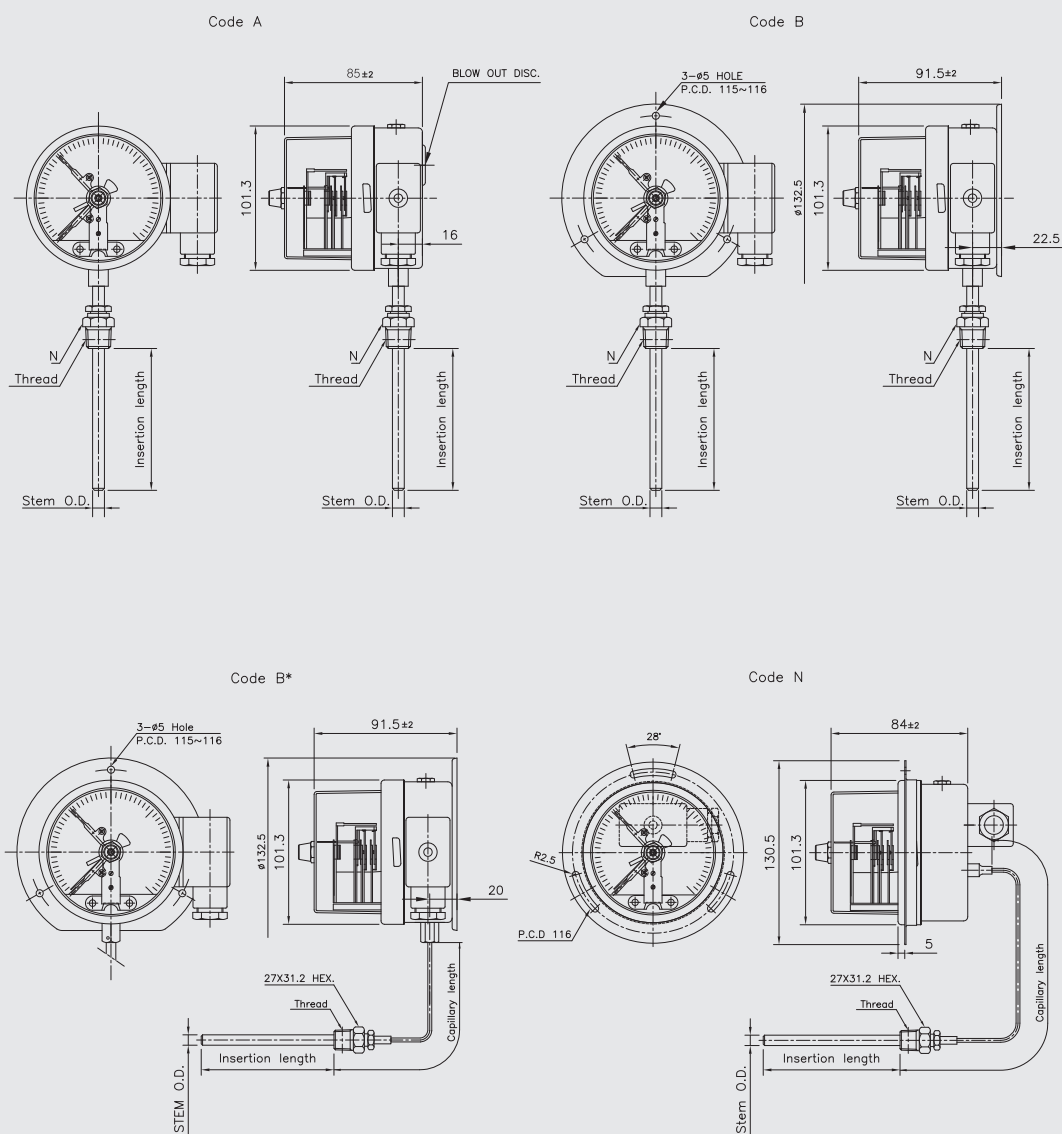

Inductive contacts

General

Electromechanical limit switches in pointer type measuring instrument are equipped with electrical distance sensor (Proximity sensor).

The output signal is govern by the presence or absence of control vane moved by actual value pointer in the magnetic field of the proximity sensor.

Electronic contact essentially comprise


- An adjustable red set pointer
- A supporting arm which is connected with the end set pointer and the carries the proximity sensor, and
- A control vane moved by actual value pointer.

An adjusting lock provided with a separate or fixed key is used for external adjustment of the set pointers of the built-in limit value at which the switching operation is to take place.


Technical data

Nominal operating voltage	10 ~ 30 V max.
Breaking capacity	Less than 100 mA
Switching accuracy	Approx 0.5% of the full scale value
Ambient temperature	-25 ~ 70°C
Adjusting range	Max. 280°

Terminal block arrangement

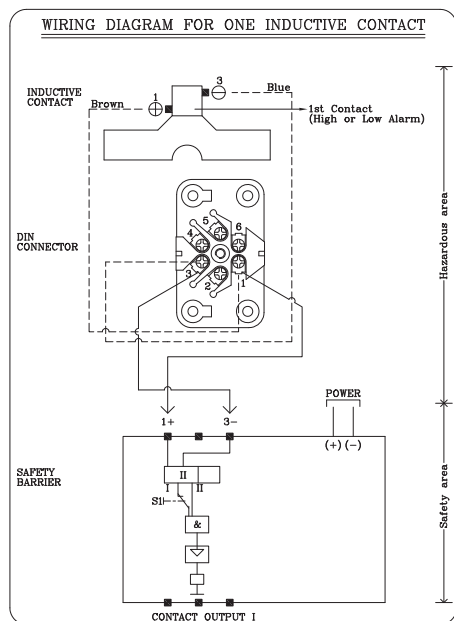

SAFETY BARRIER MODEL	Contact Output I (High or Low Alarm)	POWER
KPA5-SR2-Ex1.W(115V, AC) KPA8-SR2-Ex1.W(230V, AC) KPD2-SR2-Ex1.W(24V, DC)	7(COMMON) 8(OPEN) 9(CLOSE)	14(+) 15(-)

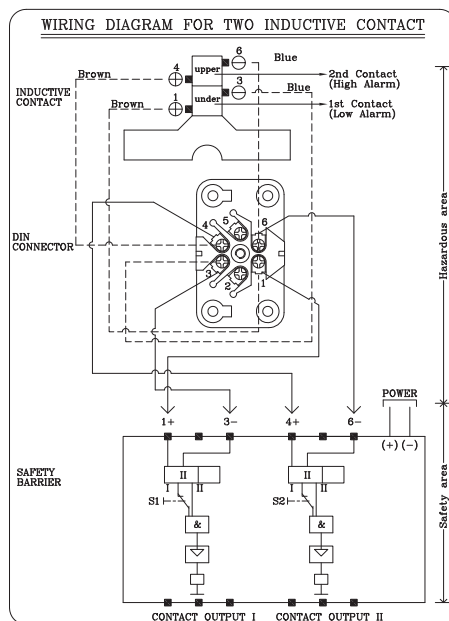

SAFETY BARRIER MODEL	Contact Output I (Low Alarm)	Contact Output II (High Alarm)	POWER
KPA5-SR2-Ex2.W(115V, AC) KPA8-SR2-Ex2.W(230V, AC) KPD2-SR2-Ex2.W(24V, DC)	7(COMMON) 8(OPEN) 9(CLOSE)	10(COMMON) 11(OPEN) 12(CLOSE)	14(+) 15(-)

Scale ranges

Code	Scale range (°C)	Scale spacing(°C)	Minimum stem length (mm)			Standard stem length (mm)		
			8.0	10.0	12.0	8.0	10.0	12.0
032	-50 ~ 50	2	100	85	65	200	130	130
037	-50 ~ 100	5	100	88	65	200	130	130
054	-30 ~ 50	2	100	85	65	200	150	150
059	-30 ~ 100	2	100	85	65	200	130	130
061	-30 ~ 120	5	100	85	65	200	130	130
069	-20 ~ 50	2	100	85	65	200	130	130
074	-20 ~ 100	2	100	85	65	200	130	130
079	-20 ~ 150	5	100	85	65	200	130	130
084	-10 ~ 50	1	100	85	65	200	130	210
099	0 ~ 50	1	100	85	65	200	130	210
100	0 ~ 60	1	100	85	65	200	130	190
101	0 ~ 70	2	100	85	65	200	130	130
102	0 ~ 80	2	100	85	65	200	130	130
104	0 ~ 100	2	100	85	65	200	130	130
106	0 ~ 120	2	100	85	65	200	130	130
109	0 ~ 150	5	100	85	65	200	130	130
114	0 ~ 200	5	100	85	65	200	130	130
119	0 ~ 250	5	100	85	65	200	130	130
124	0 ~ 300	5	100	45	40	200	130	130
129	0 ~ 350	5	100	45	40	200	130	130
134	0 ~ 400	10	100	45	40	200	130	130
144	0 ~ 500	10	100	45	40	200	130	130
154	0 ~ 600	10	100	45	40	200	130	130
164	0 ~ 700	10	100	45	40	200	130	130

* 0 ~ 700°C/Special range

Insertion length

Code	1	2	3	4	5	6	7	8	9	A	B	C
Length (mm)	50	60	70	80	100	120	130	150	175	200	225	250

Code	D	E	F	G	H	J	K	L	M	N	P
Length (mm)	275	300	350	375	400	450	500	550	1,000	1,500	2,000